


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 06/28/05'		LJC 06/28/05'
E	DRAWING UPDATE	JLZ 04/25/19'		

Female Terminal



T-DS1069-S C 6 0 0
 Contact Plating
 6: Tin

Female Terminal


Wire Range		O.D of Wire
Section Area (mm ²)	AWG#	mm
0.08~0.33	28~22	1.2~1.9

NOTES:


1. MAIN SPECIFICATIONS

- . Housing material: NYLON 66
- . Wire range: AWG#28~#22
- . Rated voltage: 250V
- . Rated current: 3A(22AWG)
- . Contact resistance: 30mΩ
- . Insulation resistance: 1000MΩ
- . Withstanding voltage: 500V,AC 1 minute
- . Temperature range: -25 ~ +85°C
- . Recommend PC board thickness:1.6mm

2. PRODUCT NUMBER CODE:

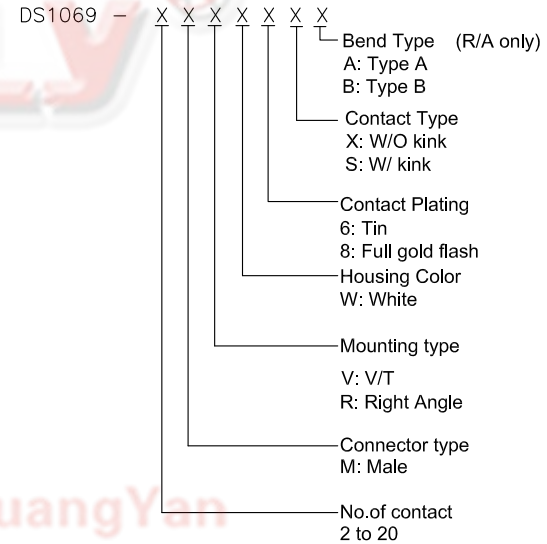


Female Housing

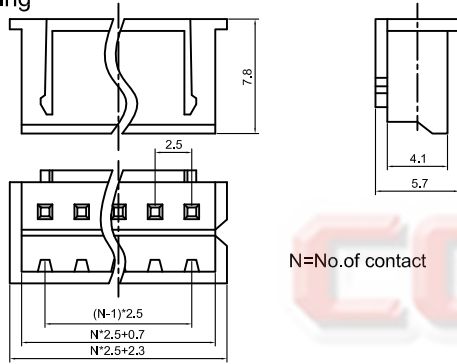

I-DS1069-S C W 0 X
 No. of contact
 02~20

N=No. of contact


Male V/T TYPE

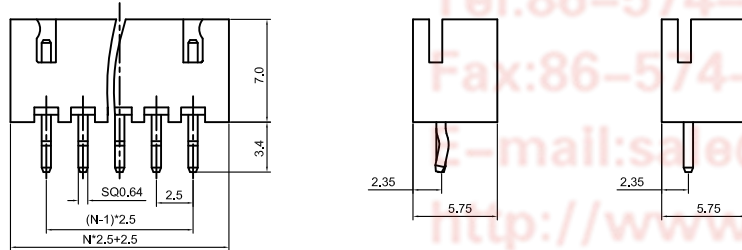

W/ kink

W/O kink

Male Right Angle

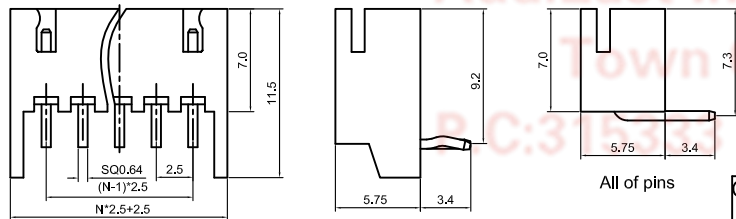

All of pins

2-7(include) pins

Type A

Type B

N=No. of contact

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION		TITLE	P.C.B CONNECTOR 2.5mm XH TYPE	
UNITS	mm	SHEET SIZE	A4	
SHEET SIZE	A4	SERIES	DS1069 SERIES	

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1069-XXXXX-E		

晨翔电子有限公司
CONNFLY CONNFLY ELECTRONIC CO. LTD

Tel:86-574-63508787
 Fax:86-574-63510817
 E-mail:sale@connfly.com
 http://www.connfly.com
 Add:East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C:315332