

Note: This datasheet may be out of date

Please download the latest datasheet of NCP21XW222J03RA from the official website of Murata Manufacturing

Co., Ltd.

https://www.murata.com/en-sg/products/productdetail?partno=NCP21XW222J03RA

NCP21XW222J03RA













Appearance & Shape










- 1. Excellent solderability and high stability in environment
- 2. Excellent long time aging stability
- 3. High accuracy in resistance and B-constant
- 4. Flow / Reflow soldering possible
- 5. Same B-Constant in the same resistance in the three sizes (0805 size / 0603 size / 0402 size)

Easy to use smaller size in the circuits

- 6. Lead is not contained in the product.
- 7. NCP series are recognized by UL/cUL (UL1434, File No.E137188).



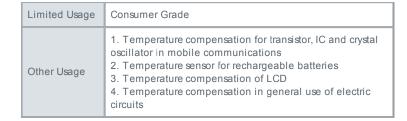



Packaging Information

Packaging	Specifications	Minimum Order Quantity
RA	180mm Embossed Tape	4000

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with no ur sales representatives or product engineers before ordering.

2. This datasheet has early being passifications because there is no expense for datafacturing the product of the product of

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering



URL: https://www.murata.com/

Last updated : 2018/08/23

Note: This datasheet may be out of date

Please download the latest datasheet of NCP21XW222J03RA from the official website of Murata Manufacturing

 $\underline{\text{Co., Ltd.}} \\ \text{https://www.murata.com/en-sg/products/productdetail?partno=NCP21XW222J03RA} \\$

NCP21XW222J03RA



Resistance (25°C)	2.2kΩ
Resistance Value Tolerance (at 25°C)	±5%
B-Constant (25/50°C)	3950K
B-Constant (25/50°C) Tolerance	±3%
B-Constant(25/80°C)(Reference Value)	3982K
B-Constant(25/85°C)(Reference Value)	3987K
B-Constant(25/100°C)(Reference Value)	3998K
Max. Voltage	5V
Maximum Operating Current (25°C)	0.302mA
Typical Dissipation Constant (25°C)	2mW/℃
Operating Temperature Range	-40°C to 125°C
Size Code (in mm)	2.0x1.25mm
Size Code (in inch)	0.8x0.5inch
Shape	SMD
Mass	0.0094g

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering




URL: https://www.murata.com/


Last updated :2018/08/23

 $\underline{\text{Co., Ltd.}} \\ \text{https://www.murata.com/en-sg/products/productdetail?partno=NCP21XW222J03RA} \\$

NCP21XW222J03RA







Resistance-Temperature Characteristics

Maximum Operating Voltage Reduction Characteristics

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering. 2.This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering

