

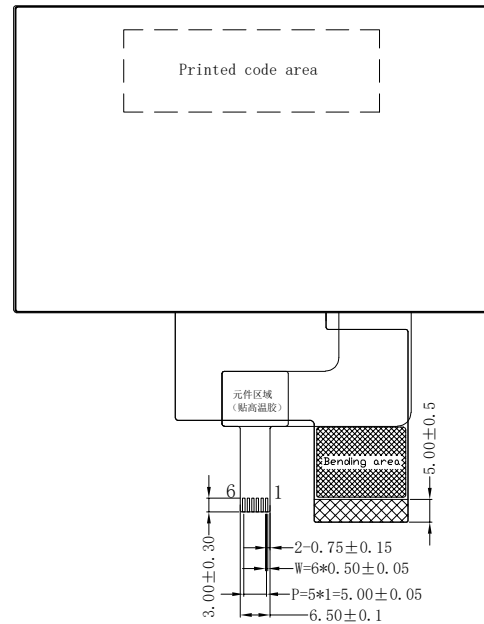
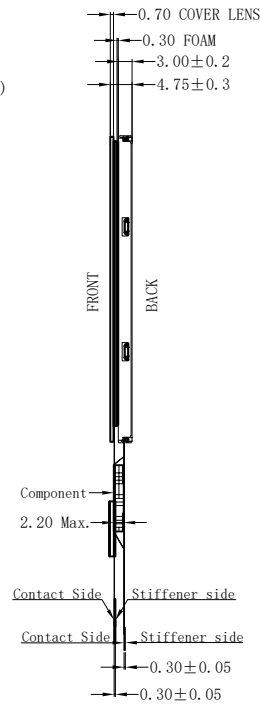


REVISE	Revision note	DATE	NAME
V0	First	2023.10.28	LYY

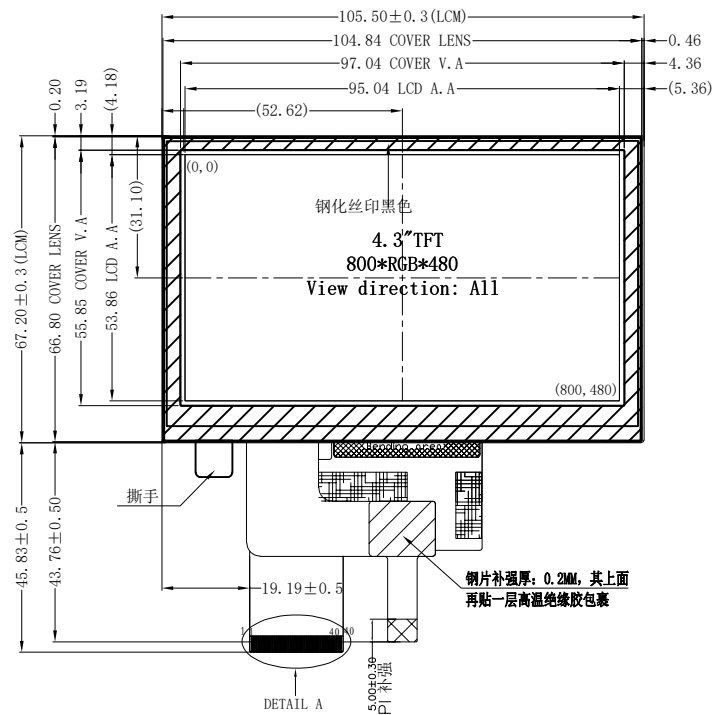


PIN FUCTION	
PIN	SYMBOL
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

PIN	DEFINE
1	VDD
2	GND
3	SCL
4	SDA
5	INT
6	WAKE

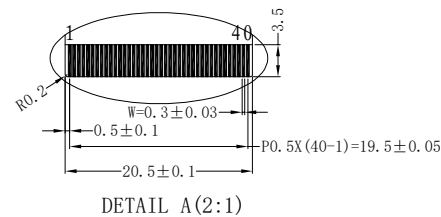

LED CIRCUIT DIAGRAM:



NOTES:

1. DISPLAY TYPE: 4.3" TFT, TRANSMISSIVE
2. VIEWING DIRECTION : U/L/D/R 80/80/80/80
3. TFT Driver IC :ST7262E43
3. CTP Driver IC :FT5446
4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
5. GENERAL TOLERANCE: ±0.2
6. LCM Luminance:LED/400cd/m² (Typical)

		广东德星微电子有限公司 Disea Electronics Co., LTD	
		Http://www.diseaelec.com	
Approved By		SIZE:	TFT_LCD 4.3"
Checked By		DWARING_NO.:	ZW-T043BWSA-22CP
Drawn By	LYY	CUSTOMER_NO.	
UNIT:mm			